

LM750EVGB MYQ DC ROLLING DOOR OPENER

Fast, silent & powerful DC motor with soft start and soft stop.



KEY FEATURES

HEAVY-DUTY
DC motor with automatic force sensing

LIFTING
For doors up to 120 kg

LED LIGHT
LED turns on with activation

MYQ COMPATIBLE



SMART

MYQ MOBILE APP LETS USERS RECEIVE ALERTS AND CONTROL THE OPENER FROM ANYWHERE.

LOW STANDBY SAVES YOUR MONEY.

SPACE-SAVING DESIGN OPENS UP THE CEILING.

SOFT-START AND SOFT-STOP FOR SMOOTH OPERATION.

QUIET AND RELIABLE

QUIET DC MOTOR 59 DB NOISE LEVEL ELIMINATES NOISE AND VIBRATIONS THROUGH THE CEILING AND PROVIDES SMOOTH OPERATION.

HEAVY LIFTING POWER OPERATES DOORS UP TO 120 KG. FOR DOORS UP TO 18m²

WARRANTY MOTOR: 5 YEARS, ACCESSORIES: 2 YEARS.

SECURE & SAFE

AUTOMATIC GARAGE DOOR OPENERS IMPEDE UNAUTHORISED ACCESS TO THE GARAGE.

TIMER-TO-CLOSE² AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME.

EVOLUTION RADIO (SECURITY+ 2.0®) SENDS A NEW CODE WITH EVERY REMOTE CLICK.

AUTOMATIC FORCE SETTING & OBSTACLE DETECTION.

AUDIBLE SIGNAL (OPTIONAL).

PARTIAL OPENING.

INCLUDED ACCESSORIES:

**4-CHANNEL
868 MHZ REMOTE CONTROL**
Operates up to 4 openers. Compact to provide quick, easy garage access.



TX4EVS

**2-BUTTON WIRELESS
WALL CONTROL**
Operates up to 2 openers. Control your garage door without a remote control.



128EV

POWERFUL ADD-ONS:

INTERNET GATEWAY²
MyQ technology that connects to the internet and allows monitoring and control of the garage opener.



828EV

WIRELESS KEYPAD
Provides convenient, secure access from outside the garage with a 4-digit PIN, temporary PIN possible.



747EV

FAILSAFE SAFETY SENSOR
2-wire system with LiftMaster signal IP44, range 15 meters.



772E

**4-CHANNEL
UNIVERSAL REMOTE CONTROL**
Operates up to 4 openers. Compact to provide quick, easy garage access.



TX4UNIF

GARAGE DOOR MONITOR²
MyQ enabled technology allows monitoring and closing up to four garage doors from any room in the house.



829EV

FAILSAFE SAFETY SENSOR
2-wire system with LiftMaster signal IP44, range 10 meters.



771EVK

LM750EVGB 550N

**MYQ DC ROLLING DOOR OPENER
FOR DOORS UP TO 120 KG**

¹ In connection with MyQ.

² needs safety sensors.

MASTERFUL ENGINEERING.

MYQ DC DIRECT DRIVE „ROLLING DOOR”
FOR DOORS UP TO 120 KG.

MOTOR


- Heavy-Duty 24 V DC
- Automatic Thermal Protection
- Permanent Lubrication
- Operating Temperature: -25°C to 55°C

POWER


- 220-240 V AC
- 50/60 Hz Voltage
- 0.8 W Stand-by Power
- 175 cm Power Cord UK

MECHANICS

- **High Quality** Chassis and Cover
- **Reliable & Powerful** Direct Drive Mechanism
- **Automatic** Force Setting
- **Electronic Limits** for Easy Setup
- **Maintenance-Free** Operation

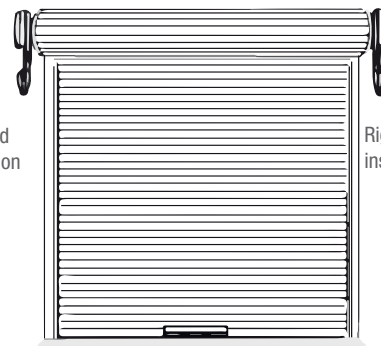

Minimum distance from edge of curtain to edge of door bracket 45 mm



STANDARD SPECS.

SECURE

EVOLUTION RADIO (Security+ 2.0®)



- 4-Button Remote Control (TX4EVS)
- Remote Control: **868 MHz Tri-Band**
- Rolling Door Opener: Frequency Agile on 868, 433.30, 433.92 and 434.54 MHz
- Copy-Protected Coding

SMART

RADIO



- Provides 2-way communication from rolling door opener and accessories.
- Receiver with 64 memory registers.

HOMELINK® COMPATIBLE
(VERSION V OR SOFTWARE REV. 8)¹

¹ May require an external adapter depending on the model and year of your vehicle. Visit HomeLink.com for additional information.

ELECTRICAL

LIGHTING LED LIGHT



- LED turns on with activation
- Turns off 3 minutes after operation
- 0.8 W Stand-by Power

SAFETY AND SECURITY.

- External Quick Release (optional)
- Down Safety Reverse
- Up Safety Stop
- Soft-Start and Soft-Stop
- Timer to Close (automatic close) Programming (when safety sensors connected)



For more information visit us at liftmaster.eu or contact your local dealer.

